





# **Features**

- Space-saving 30" (762 mm) wide design to fit a broad array of bins.
- Produces up to 1432 lbs (650 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- · Constructed from corrosion-resistant stainless steel.
- Comes equipped with a Bin Thermostat kit and ice deflectors for both bin and dispenser applications.
- ENERGY STAR® qualified.

# WATER FILTERS Ice Machine Model Manifold Inline System Replacement System ICE1506 IFQ2 IOMQ (2) N/A

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form



CUBE

	MENSIONS			
W x D x H (in.)	7/8 x 7/8 x 7/8			
W x D x H (mm)	22 x 22 x 22			
HALF CUBE DI	MENSIONS*			
W x D x H (in.)	3/8 x 7/8 x 7/8			
* * X D X H (III.)	70 / 70 / 70			

<sup>\*</sup>Top Air model available in Half Cube only.

Bin Chart Kits for Combining Wider Bins with Smaller Models

	ICE STORAGE BINS											
	Model No. Capacity Width	<b>B25</b> 242 lbs (110 kg) 30 in (762 mm)	<b>B40</b> 344 lbs (156 kg) 30 in (762 mm)	<b>B42</b> 351 lbs (160 kg) 22in (559 mm)	<b>B55</b> 510 lbs (232 kg) 30 in (762 mm)	<b>B100</b> 854 lbs (388 kg) 48 in (1219 mm)	<b>B700</b> 680 lbs (308 kg) 30 in (762mm)	<b>B1000</b> 1000 lbs (454 kg) 48 in (1219 mm)	<b>B1300</b> 1320 lbs (599 kg) 48 in (1219 mm)	<b>B1325</b> 1325 lbs (601 kg) 60 in (1524 mm)	<b>B1600</b> 1660 lbs (753 kg) 60 in (1524 mm)	
Kits	ICE1506R	Kit Not Required	Kit Not Required	N/A	Kit Not Required	KBT5	Kit Not Required					
	ICE15O6HT						KIT NOT Kequirea					

See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.
















#### Remote Cooled


- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Liquid line, 3/8" male quick connect coupling for precharged line set.
- E. Discharge line, ½" male quick connect coupling for precharged line set.
- F. Ice cube drop zone in bottom of unit.

#### Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".



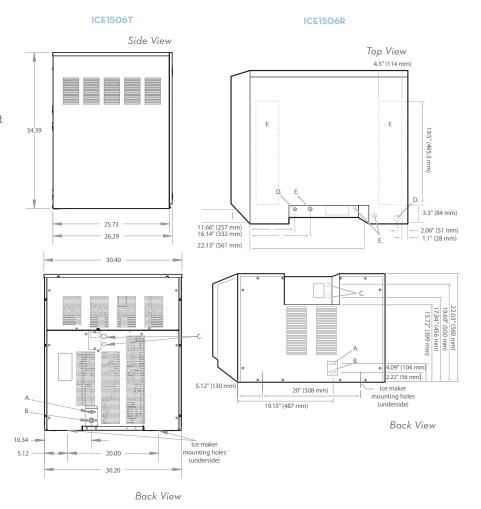

### **Operating Requirements**

	MINIMUM	MAXIMUM		
	60 Hz			
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)		
Water Temp.	40°F (4.4°C)	100 F (38 C)		
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)		

#### **Dimensions**

ICE1506R						
W x D x H (in.)	30.4 x 26.3 x 22.03					
W x D x H (mm)	772 x 668 x 560					
ICE1506HT						
W x D x H (in.)	30.4 x 26.3 x 34.39					
W x D x H (mm)	772 x 737 x 874					

\*Requires Remote VRC 2661 Condenser.

## **Specifications**

			duction 24hrs	gallons per 1	Usage 00 lbs of Ice o°F water	kWH Used				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)		Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICE15O6HR★	Remote*	1432 (650)	1216 (553)	20	-	4.67	208-230/60/1	24.5	30	22,491
ICE15O6HT★	Air	1430 (649)	1100 (499)	20	-	4.68	208-230/60/1	23.0	30	20,000

NOTES:

Number of Wires: 3 (including Approx. Shipping Weight lbs (kg): ICE15O61

3 (including ground)

ICE1506HR 300 (136) • ICE1506HT 310 (141)

Refrigerant Type: R404A

★ ENERGY STAR qualified machine. Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates

Daily is a production based on half-suba configuration. Is a O. Matic resource the right to change the constitutions at any time without obligation. Cartifications may you depending an equative of critical configuration.