

Project:	AIA#
ltem:	
Location:	SIS#
Annroyed:	

BAR EQUIPMENT - BAR MOBILE DZ24HC Solid Door Dual Zone

MODEL: DZ24HC-1-B



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior is galvanized steel with reinforced stainless steel floor
- Stainless steel top with black glass rails
- · Stainless steel drip tray for easy cleaning
- Full electronic control
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- There is an air flow damper to help control the temperature between the two refigerated compartments located at the bottom front of the divider wall
- Unit has a minimum variance of +/-15°F, and maximum of 20°F depending on condition
- 100% portable with waste bottle to capture beer/wine from drain
- Magnetic gasket provides positive door sealing
- · Self-closing door with lock standard
- 3" Insulated tower with dual faucet, standard
- Holds up to (4) 1/6 kegs in each section
- Four-inch (4") deavy duty casters with two (2) brakes

OPTIONS & ACCESSORIES

- Stainless steel interior
- Tap Locks
- 1- 4 Tap insulated stainless towers/taps
- No draft arm with hole cover

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Left hand compartment maintains 32°-40°F, Right hand maintains 50°-65°F








MODEL	DZ24HC-1-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	24"	
Depth Overall (with handle)	30 ¾"	
Height Overall (with casters)	52 ¾"	
Number of Doors	1	
Depth with Door Open 90°	52 ¼"	
Door Openings (in)	20" x 27 ‰"	
INTERNAL DIMENSIONAL DATA		
NET Capacity Freezer (cubic ft.)	(L) 3.72, (R) 3.72	
Internal Width Per Section (in)	10"	
Internal Depth Overall (in)	19 ½"	
Internal Max Height Overall (in)	29 ½"	
Number of Straight Wall Kegs	4 (1/6)	
ELECTRICAL DATA		
Full Load Amperes	1.7	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams/ounces)	0.1433 / 65 / 2.3	
SHIPPING DATA		
Gross Weight - Crated	220 lbs	
Height - Crated	46"	
Width - Crated	27"	
Depth - Crated	31"	

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Bar Equipment - Dual Zone Bar mobile Model: DZ24HC-1-B

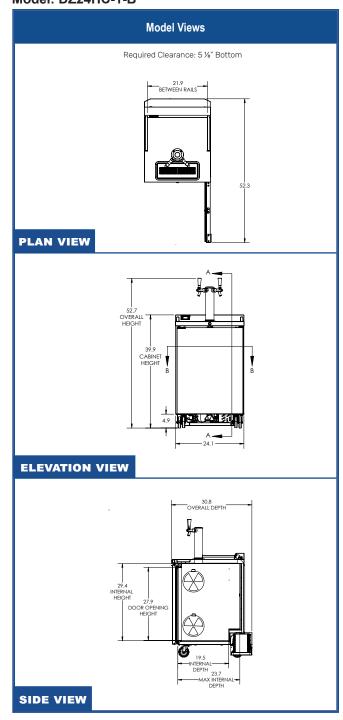



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord

