A family company manufacturing in the USA

www.glastender.com





4004503 Conforms to NSF/ANSI STD 7 and UL STD 471 Certified to CSA STD C22.2 No. 120 Listed to NSF Standard 7 for open food storage

Standard Features

- All stainless steel interior with radius corners is easy to keep clean
- · Locking doors
- LED interior lighting
- · Heated mullion to minimize condensation
- Evaporator above compressor compartment to maximize storage capacity
- Available without a finished top for integrated installation below customer supplied counter top
- · Leg sockets recessed into base
- 180° swinging doors

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Coolers, Pass-Thru, One Zone, Front Serviced, Bar Profile

CP1FB32, CP1FB36, CP1FB52, CP1FB60, CP1FB72, CP1FB84

CP1FB Configurable Options

Temperature:

- Beer/Food 34°F to 40°F
- White wine 50°F to 55°F
- Red wine 60°F to 65°F

Refrigeration Compartment Location:

Left or Right

Refrigeration Compartment Cover Finish:

- · Black vinyl-clad
- Unlaminated
- · Stainless steel
- · Jeweled stainless
- · Laminated

Door Style & Finish:

- · Door Black vinyl-clad
- Door Unlaminated
- · Door Stainless steel
- Door Jeweled stainless · Door - Laminated
- · Door Glass, black vinyl-clad
- Door Glass, stainless steel
- · Door Glass, jeweled stainless
- · Door Glass, laminated

Door Hinge Location (specify for each door):

· Left or Right

Door Handle:

- Polished stainless
- · Polished brass
- · Stainless pull tab

Top Style:

- · No finished top
- Stainless top
- Laminated top

Left and Right Side Finish:

- · Black vinyl-clad
- · Stainless steel
- Laminated

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- · Blue

See our Product Directory for a complete list of cooler accessories.

Specifications

Electrical

- 120V, 1 phase, 60 Hz
- Full load amps CP1FB32, CP1FB36 3.0, CP1FB52, CP1FB60, CP1FB72, CP1FB84 - 7.0
- Dedicated 15 amp circuit is required
- Includes a 6 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment Refrigeration

• R290

- Compressor CP1FB32, CP1FB36 1/8HP, CP1FB52, CP1FB60, CP1FB72, CP1FB84 - 1/4HP
- Heat rejection CP1FB32, CP1FB36 1228 BTU/Hr, CP1FB52, CP1FB60, CP1FB72, CP1FB84 - 2867 BTU/Hr

Operating Range

• 34°F (1°C) to 40°F (4°C)

Plumbing

- · Automatic condensate evaporator. No drain connection required. Shelving
- Three adjustable coated shelves per section included Materials
 - Stainless steel parts include: interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
 - Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: exterior sub-top, back and bottom
- Zinc plated CR steel parts include: leg sockets

Weight Bearing Capacity

• Counter tops and other accessories should not exceed 200 pounds per door

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Coolers - Pass-Thru, One Zone, Front Serviced, Bar Profile


Dimensional Information

PLAN VIEW 16" DOOR OPENING PLAN VIEW 20" DOOR OPENING -12"-SWING WILL SWING WILL **CONTINUE IF CONTINUE IF** 18-1/2" 18-1/2" NO CABINET **NO CABINET** DOOR SILL TO DOOR SILL TO TO IMPEDE TO IMPEDE DOOR SILL DOOR SILL :-------180° 180° CONDENSING UNIT SWING . CONDENSING UNIT **SWING** COMPARTMENT COMPARTMENT


FRONT VIEW - 16" DOOR OPENING


ADD 1" TO HEIGHT FOR FACTORY INSTALLED TOP

FRONT VIEW - 20" DOOR OPENING

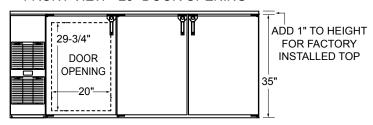



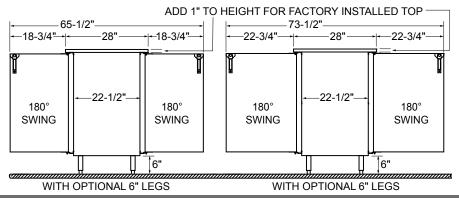



Note: Available with compressor left or right. Compressor left model shown.

				Capacities			
16" Door Opening Models	Х	Υ	DOORS	12 oz. bottles, cases	750ml wine bottles*	1/2 barrel kegs	1/6 barrel kegs
CP1FB32	32"	16"	2	6.6	67	N/A	2
CP1FB52	52"	36"	4	14.6	129	N/A	7
CP1FB72	72"	56"	6	23.1	209	N/A	12

				Capacities				
24" Door Models	Х	Υ	DOORS	12 oz. bottles, cases	750ml wine bottles*	1/2 barrel kegs	1/6 barrel kegs	
CP1FB36	36"	20"	2	8.8	79	1	4	
CP1FB60	60"	44"	4	19.1	177	2	8	
CP1FB84	84"	68"	6	29.9	271	4	14	