

Non-Refrigerated Self-Service Case

- ☐ NR3647DSSV
- ☐ NR4847DSSV

Lengths include end panels
35-3/4"L x 33"D x 47-1/8"H
47-3/4"L x 33"D x 47-1/8"H



STANDARD FEATURES

- NOTE: Contact Factory for lead time
- NOTE: Glass warranty only applicable to first point of delivery
- (2) Levels of clear glass shelving removable and adjustable on 1" centers
- LED top & shelf lights
- One piece formed ABS plastic tub
- One year parts & labor warranty

Features	Standard	Options
EXTERIOR COLOR	☐ Black	☐ Painted (non-stock colors, specify RAL#) ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
INTERIOR COLOR	☐ Black	☐ NOTE: Interior color must be FDA & NSF approved ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
PANEL EXTERIOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel
BASE SUPPORT	☐ Adjustable, locking casters (n/a w/ remote ref.)	☐ 6"H stainless steel legs
END PANEL LEFT	☐ Full end panel	☐ No end panel
END PANEL RIGHT	☐ Full end panel	☐ No end panel
LOWER FRONT PANEL	☐ Black	☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
LOWER REAR PANEL	☐ Black	☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
UPPER REAR	☐ Solid back panel	☐ Clear glass rear sliding doors ☐ Reflective glass rear sliding doors
LIGHTS	☐ LED 3500K w/ frosted lens	☐ LED 3000K w/ frosted lens ☐ LED 4000K w/ frosted lens
ELECTRICAL CONNECT	☐ 12" straight blade power cord	☐ 12" locking power cord ☐ Electrical leads (non-refrigerated)
MISCELLANEOUS		☒ 14.5" Base height extension ☐ Rear door lock ☐ Second year parts & labor warranty
ACCESSORIES		☐ Clear acrylic security cover, removable, locking

Option Notes: 1 - Cannot be combined w/ 6"H legs

Reveal®




Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

SIDE VIEW

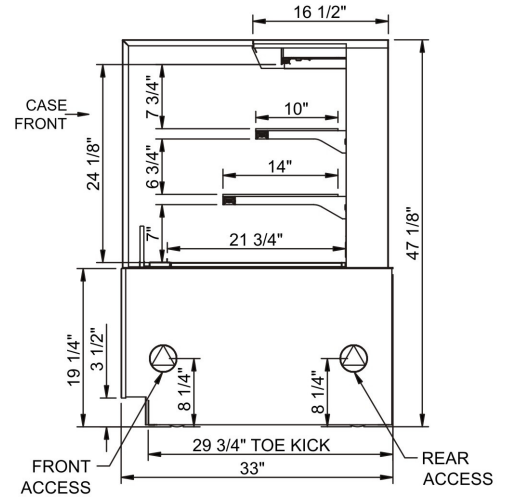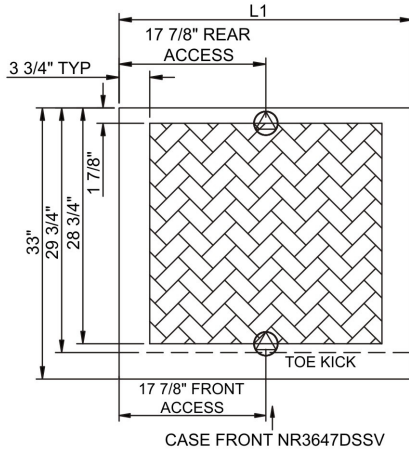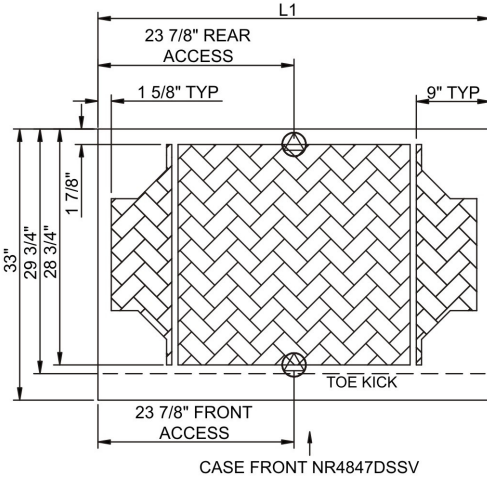

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
NR3647DSSV	N/A	35.75	.00	Ambient	Circuit #1	110-120	1	60	0.70	11	2+G	5-15P or L5-15P	N/A	N/A	N/A	600
NR4847DSSV	N/A	47.75	.00	Ambient	Circuit #1	110-120	1	60	0.70	17	2+G	5-15P or L5-15P	N/A	N/A	N/A	700

*** Does not include electric defrost on freezer models.

Important Notes:

- ELECTRICAL NOTE:** If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- Glass warranty only applicable to first point of delivery.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Regulatory Approvals:	
All Models	ETL Listed to UL 65 ETL Sanitation to NSF 2