

A family company manufacturing in the USA

www.glastender.com





Intertek

4004503 Conforms to NSF/ANSI STD 7 and UL STD 471 Certified to CSA STD C22.2 No. 120 Listed to NSF Standard 7 for open food storage

Standard Features

- Locking door(s) (drawers sections do not lock)
- LED interior lighting
- Heated mullion to minimize condensation
- Any door opening may be converted to a drawer
- Available without a finished top for integrated installation below customer supplied bar top
- 180° swinging door

| Project: | AIA# | |
|----------|------|------|
| Item #: | Qty: | SIS# |
| Model #: | | |

Coolers, One Zone, Side Serviced, Low Profile

C1SL24, C1SL28, C1SL36, C1SL44, C1SL48

C1SL Configurable Options

Temperature:

- Beer/Food 34°F to 40°F
- White wine 50°F to 55°F
- Red wine 60°F to 65°F

Refrigeration Compartment Location:

Left or Right

Refrigeration Compartment Cover Finish:

- · Black vinvl-clad
- Stainless steel
- · Jeweled stainless

Door/Drawer Style & Finish:

- Door Black vinyl-clad
- Door Unlaminated
- Door Stainless steel
- Door Jeweled stainless
- · Door Laminated
- Door Glass, black vinyl-clad
- · Door Glass, stainless steel
- Door Glass, jeweled stainless
- · Door Glass, laminated · Drawers - Black vinyl-clad
- · Drawers Stainless steel
- · Drawers- Jeweled stainless
- Drawers Laminated

Door Hinge Location (specify for each door):

· Left or Right

Door Handle:

(Note: drawers come with a stainless pull tab handle and no lock)

- · Polished stainless
- · Polished brass
- · Stainless pull tab

Top Style:

- No finished top
- Stainless top
- Laminated top
- Drainboard top

Left and Right Side Finish:

- · Black vinyl-clad
- · Stainless steel
- · Laminated

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

See our Product Directory for a complete list of cooler accessories.

Specifications

Electrical

- · 120V, 1 phase, 60 Hz
- Full load amps 2.75
- Dedicated 15 amp circuit is required
- Includes a 6 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment

Refrigeration

- R290 105 grams
- Compressor 1/8 HP
- · Heat rejection 1126 BTU/Hr

Operating Range

34°F (1°C) to 40°F (4°C)

Automatic condensate evaporator. No drain connection required.

Shelving

Two adjustable coated shelves per door included (does not include wine drawer sections)

- · Stainless steel parts include: interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: exterior sub-top, back and bottom
- Zinc plated CR steel parts include: leg sockets

Weight Bearing Capacity

• Counter tops and other accessories should not exceed 500 pounds per door


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 Approval/Notes: 989.752.4275 • 800.748.0423 • Fax 989.752.4444


| www.giastender.com | |
|---|--------------|
| Specifications subject to change without notice. For current specifications please visit our website. | |
| Printed in USA | Rev 01-17-19 |


C1SL

Coolers - One Zone, Side Serviced, Low Profile

Dimensional Information

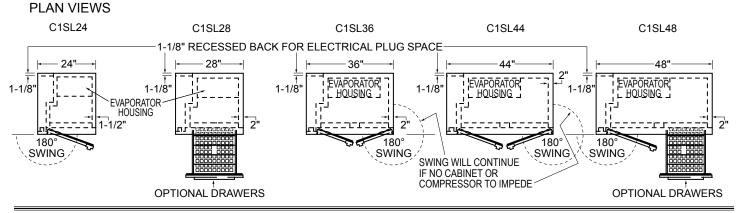

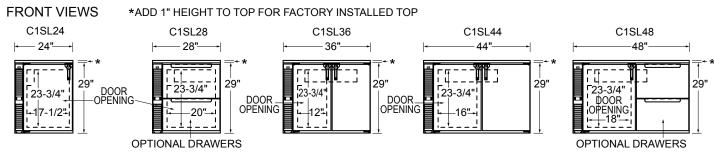

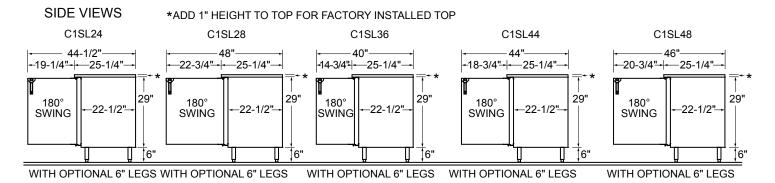

Note: Available with compressor left or right. Compressor left model shown.

| | | Capacities | |
|--------|-------|-----------------------|---------------------|
| Model | DOORS | 12 oz. bottles, cases | 750ml wine bottles* |
| C1SL24 | 1 | 4.5 | 48 |
| C1SL28 | 1 | 5.1 | 53 |
| C1SL36 | 2 | 6.9 | 85 |
| C1SL44 | 2 | 8.9 | 93 |
| C1SL48 | 2 | 10.3 | 134 |

^{*}Wine bottle capacity is based on shelves. Drawers are not intended for upright storage of wine bottles.

SIDE VIEWS

