

# **Built-In Drawer Warmers - Standard and Narrow**

Models: HDW-1B, -2B, -3B HDW-1BN, -2BN, -3BN

Hold everything from meat to vegetables to rolls in the Hatco Built-In Drawer Warmer. Each drawer features adjustable sliding vents and individual thermostatic controls to hold a wide variety of hot foods safely for peak serving periods.

#### Standard features

- Available in narrow and standard widths
- Each drawer has a recessed individual thermostatic control, temperature monitor, and On/Off switch
- Heavy-duty drawer slides with nylon rollers
- Adjustable sliding vents on each drawer
- The pan supplied with each drawer lifts straight out of standard width Drawer Warmers 20.75" x 12.75" x 6" (527 x 324 x 152 mm)
- Completely insulated individual cavities provide maximum energy efficiency
- Unit comes with 4' (1219 mm) flexible conduit
- Two-year parts warranty on heating elements and drawer rollers and slides

Project _	
Item # _	
Quantity	



<b>Options</b>	(available at time	of purchase only)
----------------	--------------------	-------------------

Designer Drawer Front Colors – Non-standard colors are non-returna								
	□Black	☐ Gray Granite	☐ White Granite					
□ Navy Blue	☐ Hunter (	Green ´□Antiqu	e Copper					

- ☐ITC Digital Temperature Control (required on all drawers)
- □ Oversized Drawer Frame and Pan 20" x 15" x 5" (508 x 381 x 127 mm) (Standard width models only)
- ☐ Biscuit Pan Drawer (Accommodates two 18" x 13" (457 x 330 mm) Half-size Sheet Pans not included) (Standard width models only)
- ☐ Chip Guard (HDW-1B, 2B and 3B only)

#### **Accessories**

- ☐ Custom trivet raises food product .5" (13 mm) off bottom of full size pan 17.5" x 9.5" x .5" (445 x 242 x 13 mm)
- □ Water/Spillage Pan one per drawer (excludes BIS Drawer and OS-Pan Options)
- ☐ Splash Baffle one per drawer, Water/Spillage Pan creates humidified environment (excludes BIS Drawer and OS-Pan Options)
- ☐ Stainless Steel Food Pans








## **Built-In Drawer Warmers - Standard/Narrow**

Models: HDW-1B, -2B, -3B HDW-1BN, -2BN, -3BN

#### **Built-In Drawer Warmer - Standard and Narrow**

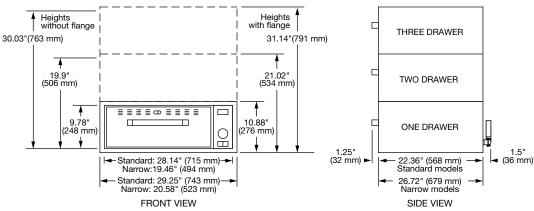


#### **SPECIFICATIONS Built-In Drawer Warmer - Standard and Narrow**

The shaded areas contain electrical information for International models

Model	Dimensions <sup>◆</sup> (Width x Depth x Height)	Volts	Phase	Watts	Amps	Plug	Ship Weight*
HDW-1B HDW-1BN	28.14" x 22.36" x 9.78" (715 x 568 x 248 mm) 19.46" x 26.72" x 9.78" (494 x 679 x 248 mm)	100	Single	450	4.5	Hardwired with conduit	88 lbs. (40 kg)
		120	Single	450	3.8		
		208			2.2		
		240			1.9		
		220		450	2.0		
		240	Single		1.9		
		220-230 (CE)	Sirigle	450-492	2.0-2.1		
		230-240 (CE)		413-450	1.8-1.9		
HDW-2B HDW-2BN	28.14" x 22.36" x 19.9" (715 x 568 x 506 mm) 19.46"x 26.72" x 19.9" (494 x 679 x 506 mm)	100	Single	900	9.0	-	159 lbs. (73 kg)
		120	Single		7.5		
		208		900	4.3		
		240			3.8		
		220	Single	900	4.1		
		240		300	3.8		
		220-230 (CE)		900-984	4.1-4.3		
		230-240 (CE)		826-900	3.6-3.8		
HDW-3B HDW-3BN	28.14" x 22.36" x 30.03" (715 x 568 x 763 mm) 19.46" x 26.72" x 30.03" (494 x 679 x 763 mm)	100	Single	1350	13.5		
		120	Single		11.3		
		208		1350 6.5 5.6	7		
		240			5.6	-	232 lbs. (106 kg)
		220	Single	1350	6.1		
		240			5.6		
		220-230 (CE)		1350-1476	6.1-6.4		
		230-240 (CE)		1239-1350	5.4-5.6		

<sup>\*</sup>Add 1.14" (29 mm) to width or height for flange. Add 1.25" (32 mm) to depth for drawer handle.\*Shipping weight includes packaging.

#### Locking Strip position for cut-out requirements



## **PRODUCT SPECS**

#### **Built-In Drawer Warmer - Standard and Narrow**

The Drawer Warmers shall be a Hatco Model  $\dots$  , built-in as manufactured by the Hatco Corporation, Milwaukee, WI 53234, U.S.A.

The unit shall have ... drawer(s) and be rated at ... watts, ... amps. Built-In model with 4' (1219 mm) flexible conduit.

The Drawer Warmer shall have a stainless steel exterior, interior, drawer slides, and

assembly. Drawer rollers shall be durable nylon. The drawer assembly shall fully

The unit shall be individually insulated top, bottom and sides of cabinet, Each unit shall have individual power switch, thermostat and temperature monitor for each drawer.

**Built-In Cut-Out Requirements** 

Depth\*

(610 mm)

28.375"

▲Depth dimension includes 1.5" (38 mm) for conduit connector.

(720 mm)

24"

Height

10.13" (257 mm)

20.25" (514 mm)

30.75" (771 mm)

10.13" (257 mm)

20.25" (514 mm)

30.75" (771 mm)

Width

28.375

19.7"

(720 mm)

(500 mm)

Comes with 24/7 parts and service assistance (U.S. and Canada only).

# extend to allow removal of pans without tilting in standard width models.

Model

HDW-1B

HDW-2B

HDW-3B

HDW-1BN

HDW-2BN

HDW-3BN

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

equipsales@hatcocorp.com intlsales@hatcocorp.com (800) 558-0607 (414) 671-6350 www.hatcocorp.com