

Project:	_ AIA#
Item:	_
Location:	- SIS#
Approved:	

# **BB BAR EQUIPMENT - BACK BAR REFRIGERATOR**

BB48HC Sliding Glass Door Food Rated Hydrocarbon Series

MODELS: BB48HC-1-F-GS-B BB48HC-1-F-GS-S



BB48HC-GS-F-1-B

## **OPTIONS & ACCESSORIES**

- 2" Stainless steel top
- ☐ Wine model (40°-60° models)
- ☐ Wine shelf divider
- Pass-thru models available
- 3" or 6" casters
- Glass or solid doors
- Remote option

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior black or stainless steel
- Stainless steel interior
- Full electronic control
- Galvanized sub-top
- Two (2) epoxy coated shelves per section, standard
- Self-closing sliding glass doors have black frame regardless of finish
- Stay-open feature
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Certified for open food product
- Compressor available on left or right, specify at time of unit order
- Balanced, forced air refrigeration system provides rapid chilling of product
- Maintains product temperature between 36°F and 38°F

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	BB48HC-1-F-GS-B	BB48HC-1-F-GS-S
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	48"
Depth Overall	23 5/8"	23 5/8"
Height Overall	34"	34"
Number of Doors	2	2
Doors Opening (in)	-	-
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	12.4	12.4
Internal Width Overall (in)	36"	36"
Internal Depth Overall (in)	18 1/4"	18 1/4"
Internal Height Overall (in)	28"	28"
Number of Shelves	4	4
Number of Kegs	2	2
ELECTRICAL DATA		
Full Load Amperes 115/60/1	2.5	2.5
REFRIGERATION DATA		
Horsepower	1/4	1/4
Capacity (BTU/Hr)*	1702	1702
WEIGHT DATA		
Gross Weight (Crated lbs)	284 lbs	284 lbs
Height - Crated	43"	43"
Width - Crated	51"	51"
Depth - Crated	27"	27"

# Bar Equipment-Back Bar Refrigerator Sliding Glass Doors Food Rated

Model: BB48HC-1-F-GS-B, BB48HC-1-F-GS-S

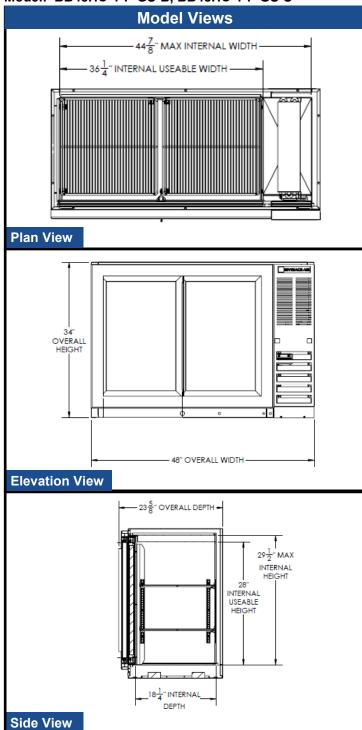

#### **ELECTRICAL CONNECTION**















Units pre-wired at factory and include 8' long cord and plug set.

