

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

BAR EQUIPMENT- BACK BAR REFRIGERATOR

MODEL: BB72HC-1-F-GS-S-27

BB72HC Sliding Glass Door Food Rated With Stainless Steel Top Hydrocarbon Series

> 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



CABINET CONSTRUCTION

- · Exterior is stainless steel front and sides
- · Stainless steel interior
- Full electronic control
- 2" Stainless steel top
- Six (6) epoxy coated shelves
- Self-closing sliding glass doors have black frame regardless of finish
- Stay-open feature and locks standard
- Magnetic door gaskets provide positive door sealing
- LED lighting
- · Certified for open food product
- · Compressor available on left or right, specify at time of unit order
- Balanced, forced air refrigeration system provides rapid chilling of product

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Galvanized sub-top
- Wine model (40°-60° models)
- · Wire shelf divider
- Additional shelves
- · Additional shelf clips
- 3" or 6" Casters
- 6" Black legs
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F










MODEL	BB72HC-1-F-GS-S-27
EXTERNAL DIMENSIONAL DATA	
Width Overall	72"
Depth Overall	23 %"
Height Overall	36"
Number of Doors	2
Door Openings (in)	18 ½" x 26 ¼"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	19.92
Internal Width Useable (in)	60 1⁄4"
Internal Depth Overall (in)	18 ½"
Internal Height Overall (in)	29 ¾"
Number of Shelves	4
Number of 1/2 Kegs	2
ELECTRICAL DATA	
Full Load Amperes	3.1
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)	1942
Heat Rejection (BTU/Hr)	2913
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9
SHIPPING DATA	
Gross Weight - Crated	392 lbs
Height - Crated	43"
Width - Crated	75"
Depth - Crated	27"

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bar Equipment-Back Bar Refrigerator Model: BB72HC-1-F-GS-S-27

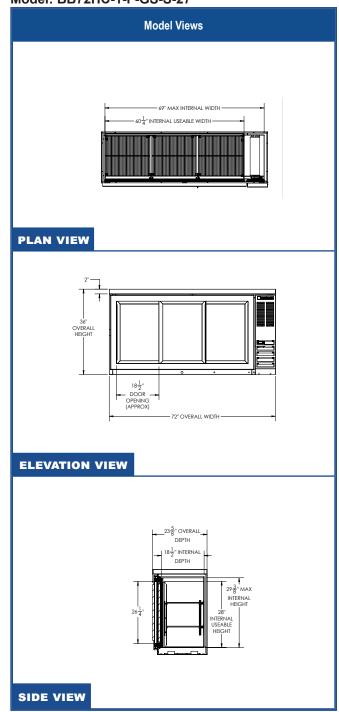





ELECTRICAL CONNECTION

115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

