

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

UCF UNDERCOUNTER FREEZER

UCF32AHC Glass Door Undercounter Hydrocarbon Series MODELS: UCF32AHC-25



UCF32AHC-25

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- LED lighting
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Easy door removal for service and cleaning
- Magnetic gaskets attached to each door for positive seal
- Anti-microbial door handles
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves
- Field reversible doors
- Maintains product temperatures of 0° F and below

OPTIONS & ACCESSORIES

- Stainless steel back and grille
- Stainless steel interior
- Right or left hinged door
- Locks (solid doors only)
- □ Bun rack
- ☐ Wire shelf divider
- ☐ Thermometer digital of stem type dial
- 3" Casters or 6" legs
- Low profile casters
- Remote option

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, electric defrost
- Epoxy coated evaporator coil


















MODEL	UCF32AHC-25
EXTERNAL DIMENSIONAL DATA	
Width Overall	32"
Depth Overall with Handle & Bumper	32 5/8"
Height Overall with 6" casters	34 5/8"
Number of Doors	1
Depth with Door Open 90°	60 1/4"
Door Opening (in)	27 1/2" x 21 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	7.2
Internal Width Overall (in)	28"
Internal Depth Upper (in)	18 1/4"
Internal Depth Lower (in)	15 1/4"
Internal Height Overall (in)	23"
Number of Shelves	2
ELECTRICAL DATA	
Full Load Amperes 115/60/1	4.0
REFRIGERATION DATA	
Horsepower	1/3+
Capacity (BTU/Hr)*	1184
WEIGHT DATA	
Gross Weight (Created lbs)	230 lbs
Height - Crated	35"
Width - Crated	32"
Depth - Crated	32"

Undercounter Freezer

Models: UCF32AHC-25

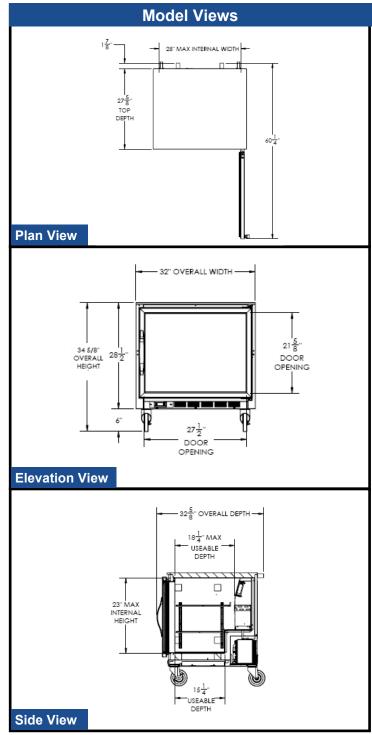

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.



